


INTRODUCTION



Comparison of conventional and patented terminal cover

The biggest vulnerability of the leads for a meter or tester is the terminal connections, which could often have bad contact. Our patented screw end has completely offset the bending oppression, which makes it lasts at least ten times longer.

- Patent No.
 U.S.A US 6,265,668 BI
 GERMANY 299 12 812 • 1
 CHINA ZL 99 2 16904 • 6

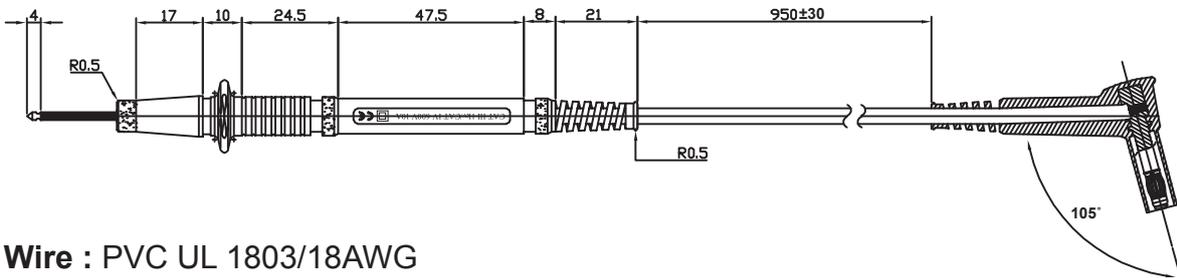

- **Wire :** PVC UL 1803/18AWG
 length : 1100±30mm
 Out diameter : 4.0mm
 Temperature tolerance range : -40°~105°
 Braid copper wires : 170/0.08mm
- **Terminal :**
 105° angle 4mm brass banana plug(nickel plated) with caged and insulated Sheathing to avoid the brass oxidation.
- **Rating :**
 EN 61010-031:2002+AI:2008
 CAT III 1000V 15A(170/0.08) / CAT IV 1000V 15A(200/0.08)



AL-11



- 4mm banana plug
- Suitable for **AL-23C, AL-23CA, AL-25C** alligator

AL-11A